

Patchcord/optical connector

FlexMPO™ Patchcords

We provide the highest quality of required cabling under many industry standards. Short boot MPOs are available.




Features

- >> Short body
- >> Gender changeable
- >> Push-Pull tab
- >> Push-Pull operation
- >> Polarity changeable


Short body, Reduce cabling space

World's top class

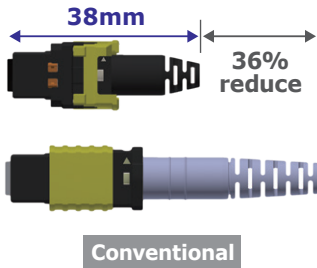


Telcordia GR-1435-CORE compliant


Strong Body

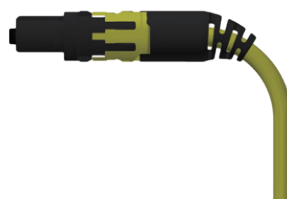

Gender changeable

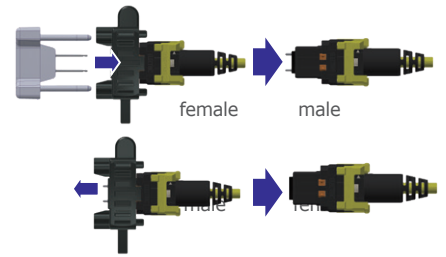


Push-Pull tab

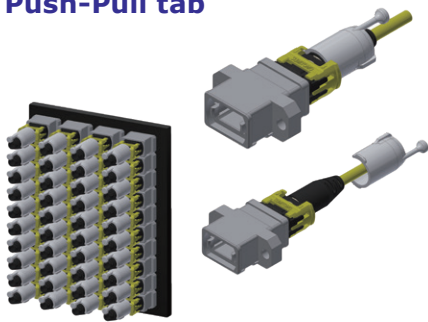


Push-Pull operation

World's first

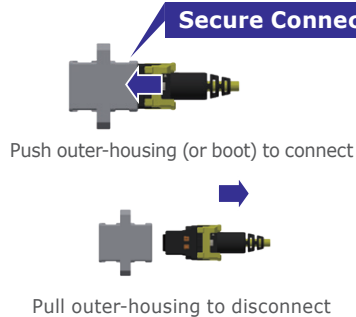

Polarity Changeable (Mainly for MMF)

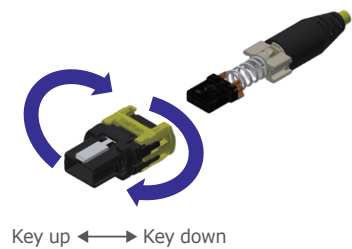

Specification

Description	Single Mode (Standard Loss)	Single Mode (Low Loss)	Multi Mode (Standard Loss)	Multi Mode (Low Loss)
Insertion Loss (Typical)	≤0.25dB (All Fibers)	≤0.10dB (All Fibers)	≤0.20dB (All Fibers)	≤0.08dB (All Fibers)
Insertion Loss (Max)	≤0.75dB	≤0.35dB	≤0.60dB	≤0.35dB
Return Loss	≥60dB	≥60dB	≥20dB	≥20dB
Operating Temperature	-40°C ~ +75°C			
Ferrule Type	12F, 24F	12F, 24F	12F, 24F	12F, 24F