


Global Series Closure [In-Line Type]

GI8s

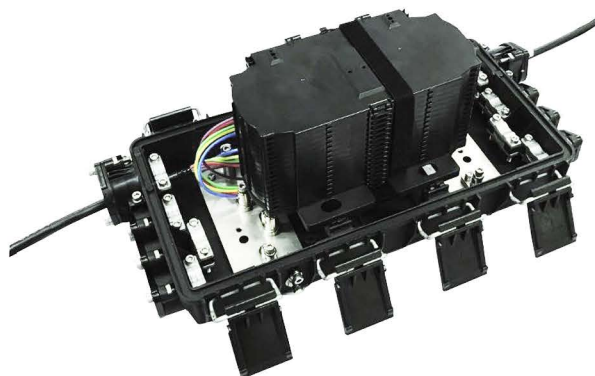

Example of use: The product does not include cables or cords other than the module.

✓ Features

- >> High density in-line closure of compact size
- >> 384f single splice / 720f ribbon splice and max. 432f single splice / 864f ribbon splice capacity by changing position of tray base
- >> Capacity for 2 main cables and max. 6 branch joints, or 24 round type drop cables, or 48 flat type drop cables
- >> The latest inline closure with split main port for easy installation of high count cable
- >> Single piece gasket which is independent from the cable port grommets, providing secure air and water tightness

Product name	GI8s	
Installation	Underground	
Applicable fiber	Single fiber	12-fiber Freeform Ribbon™
Splice capacity	384 fibers (16 trays) / max. 432 fibers (18 trays)	720 fibers (10trays) / max. 864 fibers (12 trays)
Number of splice per tray	24 splices per tray	6 splices per tray
Cable entry capacity	Main 2 cables, Branch 6 cables or 24 round drop cables or 48 flat drop cables	
Applicable cable diameter	Main Cable φ8-24mm, Branch cable φ8-20mm Round Drop φ3.5-7.5mm, Flat Drop 1.8-2.5x 3.0-4.5mm	
Operating temperature	-20 - +60°C	
IP rating	IP68	
Dimension	185(W)X238(D)X667(H)mm	
Weight	Approx. 6.0kg	

CONTACT US :

Sumitomo Electric Industries, Ltd.
1-3-13, Motoakasaka, Minato-ku, Tokyo 107-8468, Japan
<https://global-sei.com/fttx/>