


Patchcord/optical connector

# FlexULC™ Patchcords


We provide the highest quality of required cabling under many industry standards. Short boot duplex LCs with a variety of features are available.

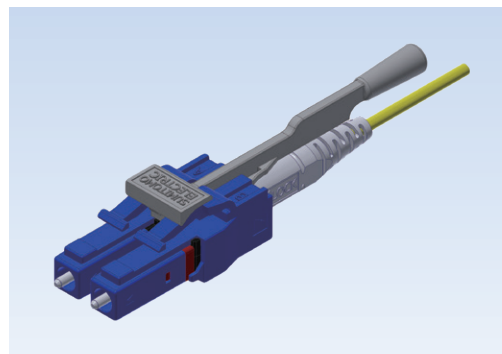


## Features

- >> Short body
- >> Polarity changeable
- >> Push-Pull tab
- >> High density


### Short body, Telcordia GR-3266-CORE compliant

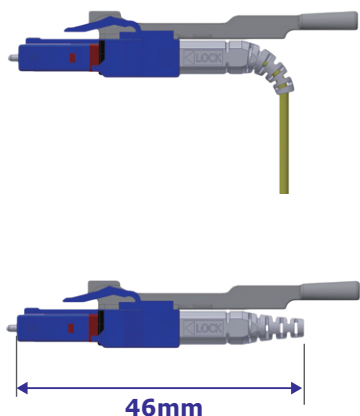


### High density cabling

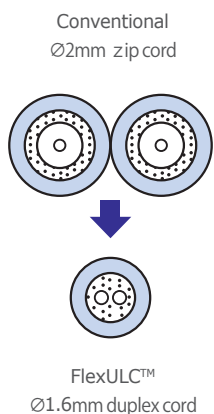

### Push-Pull tab Easy access, No tool



### Polarity changeable without tools

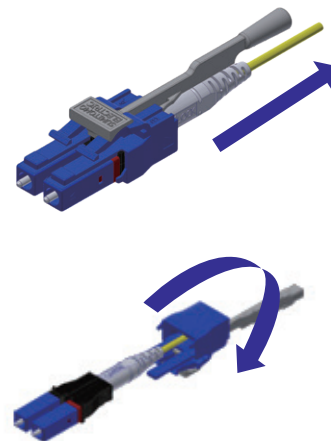

## Specification

Description	Single Mode (Standard Loss)	Single Mode (Low Loss)	Multi Mode (Low Loss)
Insertion Loss (Max)	≤0.5dB	≤0.2dB	≤0.3dB
Return Loss	≥55dB	≥55dB	≥25dB
Operating Temperature	-40°C ~ +75°C		