
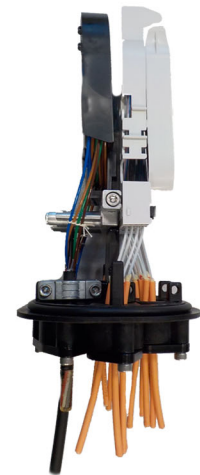


Global Series Closure [Dome Type]

GP4-424 NDC

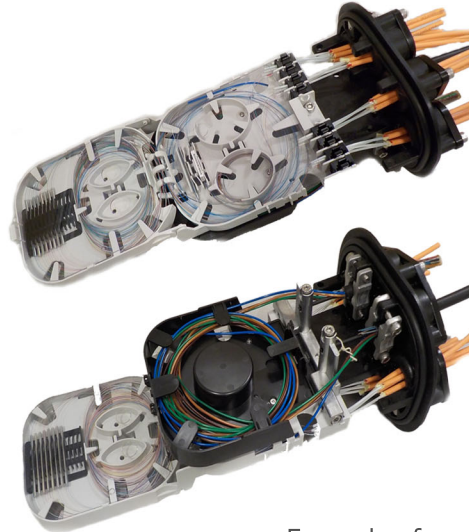

Features

Example of use: The product does not include cables or cords other than the module.

- >> ISP/OSP demarcation design by color coded tray system
- >> Compact and light weight closure
- >> Capacity for 2 main cables and max. 16 round type drop cables or max. 32 flat type drop cables
- >> Seamless work from drop cable installation, to drop fiber splicing by interconnected optical splitter mountable drop tray and splicing tray
- >> Easy and quick drop cable fixing system with newly developed cassette style drop cable retainer

Product name	GP4-424 NDC
Installation	Underground or Wall/Poll mount
Splice capacity (Single fiber)	Max. 48 fibers (Max. 24 fibers per side)
Capacity of optical splitter	1X8: 3pcs, 1X16: 3pcs
Number of port	6 ports
Cable entry capacity	Main 2 cable, Round Drop 16, Flat Drop 32
Applicable cable diameter	Main Cable ϕ 5-12mm or ϕ 10-16mm, Round Drop ϕ 3,5-7,5mm, Flat Drop 1.8-2,5x 3,0-4.5mm
Operating temperature	-20 - +60° C
IP rating	IP68
Dimension	205(W)X155(D)X275(H)mm
Weight	Approx. 3.0kg

CONTACT US :

Sumitomo Electric Industries, Ltd.
1-3-13,Motoakasaka,Minato-ku, Tokyo 107-8468 ,Japan
<https://global-sei.com/fttx>